

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T2S R1W

1/4

SEC 32 | SEC 33

U.S.B.&M.


C-9



SCALE: 1"=30'



FOUND 5/8 REBAR
WITH ALUMINUM CAP
AT 1/16 CORNER

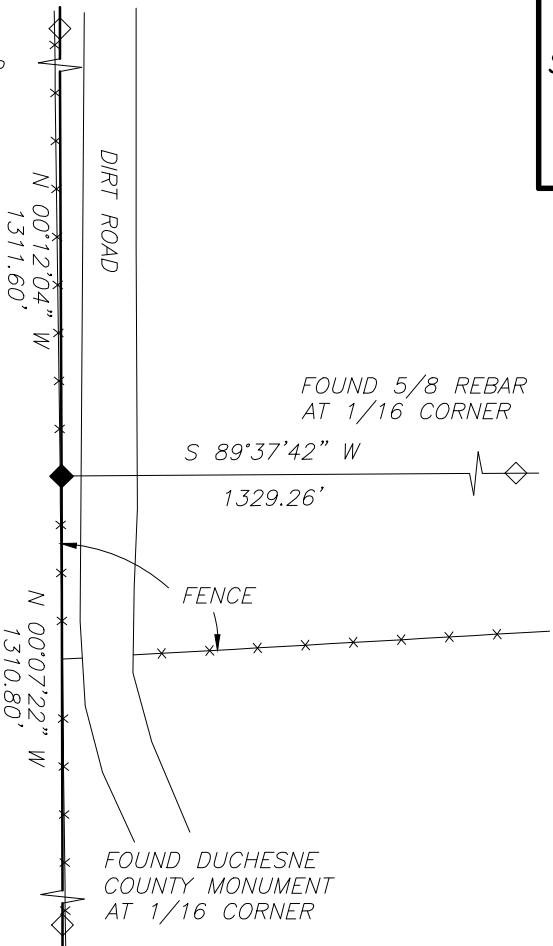

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED
FROM G.P.S. OBSERVATIONS AT A CONTROL POINT
(SECTION CORNER) LOCATED AT LAT. 40°18'07.65076"N
AND LONG. 109°59'30.70358"W USING THE UTAH STATE
G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK
MAINTAINED AND OPERATED BY THE AUTOMATED
GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND ORIGINAL MARKED STONE LAYING ON
THE GROUND NEAR THE POSITION OF THE
QUARTER CORNER. THE SET STONE HAD BEEN
FOUND AND REFERENCED ON A PREVIOUS
SURVEY



PHOTO OF MONUMENT MARKINGS

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

SET A 2½" DIAMETER ALUMINUM PIPE AND CAP
COUNTY MONUMENT AT THE POSITION OF THE
CORNER WITH THE STONE PLANTED UPSIDE
DOWN ALONG WEST SIDE OF PIPE

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7269033.802
E: 2056034.909
NAVD88 EL: 5196.57'

LATITUDE: 40°15'57.16097" N
LONGITUDE: 110°00'37.95475" W
ELLIPSOID HEIGHT: 5138.92'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300020S0010W0_300140



PHOTO OF CORNER FACING NORTHWEST

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 11 DEC '17

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

